


## UnoDim300/LCR

The light dimmer is operated using the black button at the front or via Bang & Olufsen® remote controls. This universal load light dimmer is for use with incandescent lamps and 230 V halogen lamps as well as low-voltage halogen lamps used with as well electronic as wire-wound transformers.

- 20-300VA, 230V, 50 Hz
- Simulated home occupancy
- Bang & Olufsen® compatible
- Is inserted directly into the lamp cord

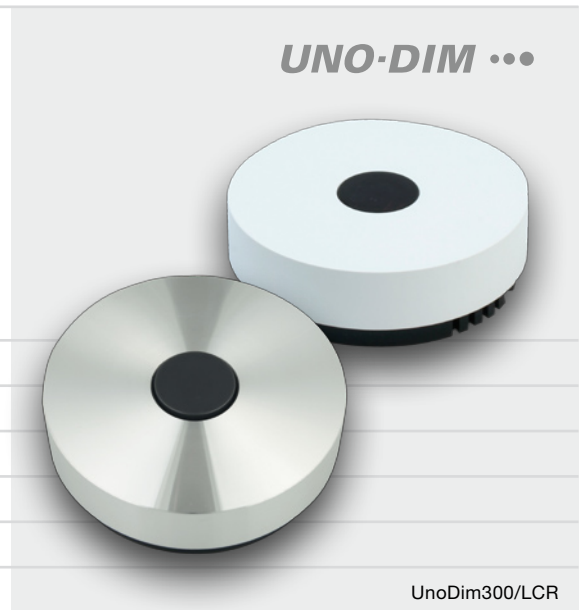

UnoDim300/LCR

### For the dimming of:


- 230V incandescent and halogen lamps
- Low-voltage halogen lamps when used with wire-wound and with electronic transformers.

Please note, that both transformer types can simultaneously be used at the same dimmer output.

### Controlled using:

- Locally by activating the black button
- Bang & Olufsen® remote controls

### Installation:

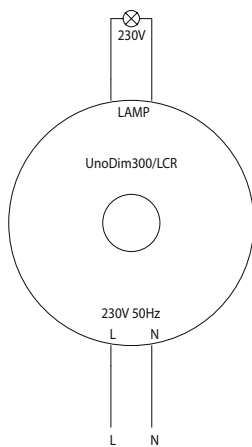

### A useful hint:

UnoDim300/LCR features an integral home occupancy simulation facility enabling the unit to automatically turn the lightson and off as well as to dim them at random if required.

Detailed user instructions are ready for download at our website [www.unotech.dk](http://www.unotech.dk)

Type		UnoDim300/LCR ALU	UnoDim300/LCR WHITE
EAN-no.	-	5706499010449	5706499010470
Mains Voltage	V	230	230
Mains Frequency	Hz	50	50
Load Range	VA	20-300	20-300
Losses at 230V	%	<2	<2
Short Circuit Protection	-	Automatic	Automatic
Thermal Protection	-	Yes	Yes
Softstart	-	Yes	Yes
Ambient Temperature (ta)	°C	+5 thru +40	+5 thru +40
Air Humidity	-	20-95% RH, non condensing	20-95% RH, non condensing
Weight	kg	0,120	0,120
Dimensions (Diameter x Depth)	mm	Ø92x30	Ø92x30
Colour (enclosure)	-	Alu	White
Material (enclosure)	-	ABS Fire Retardant/Aluminium	ABS Fire Retardant



Specifications are subject to change without notice