

2AMDI517VPVRDXBS

Four channel constant voltage dimmer DMX/PUSH/DALI/POT/0-10V/BLE

4 channels Dimmers with Output Voltage PWM.

Input Range: 8-53V DC.

Output Voltage PWM 8-53V DC with current from 0A to 8A (384W at 48V DC) for single channel.

In single channel mode current from 0A to 32A (1536W at 48V).

Parallelisable output channels.


Controllable with Android/iOS app IoT Light with different working modes: Single Channel, RGB, RGB + White, White tunable.

In order to set working modes you will need the 2AMIN4030000N interface sold separately.



Input Controls	
Type	Qty
DMX512 RDM	1
Insulated Push button	1
Not insulated Push button	4
DALI	1
Linear Potentiometer 100K	4
0-10V Passive	4
1-10V Passive	4
Bluetooth LE	1

Output Sync	
Type	Qty
DMX512	1
PWM	4

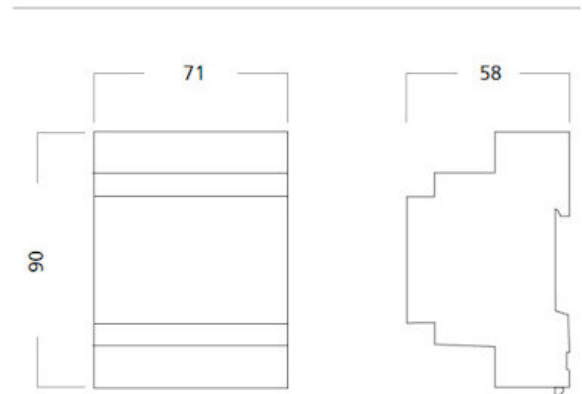

TECHNICAL NOTES

- 4 channels Dimmers with Output Voltage PWM.
- Input Range: 8-53V DC.
- Output Voltage PWM 8-53V DC with current from 0A to 8A (384W at 48V DC) for single channel.
- In single channel mode current from 0A to 32A (1536W at 48V).
- Parallelisable output channels.
- MASTER/SLAVE configuration for digital syncro with other IoT Light Dimmer or DMX512A compatible device.
- Default Configuration: SLAVE DMX512A 4 Channel.
- 2AMIN4030000N interface (optional) is required to change operating mode.
- Controllable with Android/iOS app IoT Light with different working modes: Single Channel, RGB, RGB + White, White tunable.
- Input Controls: DMX512 RDM x1, Insulated Push button x1, Not insulated Push button x4, DALI x1, Linear Potentiometer 100K x4, 0-10V Passive x4, 1-10V Passive x4, Bluetooth LE x1.
- Output Sync: DMX512 x1, PWM x4.
- Notice on 0-10V (1-10V): this control circuits is not insulated, use only insulated 0-10V(1-10V) source generator.
- PWM Frequency: 390 Hz.
- Converter DALI to DMX.
- Printed Circuit UL.
- Protection Class: IP20.
- Standard Dimension 90x70x58 mm.
- Reverse polarity protection.
- Open circuit protection.

- Surge voltage protection.
- Over temperature protection.
- Short circuit protection.
- If the control voltage of the PUSH input is higher than the SELV voltage it is necessary to use the OPTIONAL terminal / cable cover to keep the product in CLASS II.
- Use only in dry conditions.



CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	N. OUTPUT CHANNELS	MAX OUTPUT POWER	CONTROL INPUTS	CASE	DIMENSION mm
2AMD1517VPVRDXBS	8-53V DC	8A for single channel	4	384W at 48V DC for single channel 1536W at 48V DC total	DMX512 RDM x1 Insulated Push button x1 Not insulated Push button x4 DALI x1 Linear Potentiometer 100K x4 0-10V Passive x4 1-10V Passive x4 Bluetooth LE x1	YES	90x70 h 58